

05-01-2011

Mg 97/3 Injection Blend


Application: Hot metal desulfurization

Composition: min. 97% Mg metal (99,8% Mg)

balance coating

Granulation:

> 1.0 mm	0 %
0.8-1.0 mm	max. 5 %
0.5-0.8 mm	35-60 %
0.2-0.5 mm	35-60 %
< 0.2 mm	traces

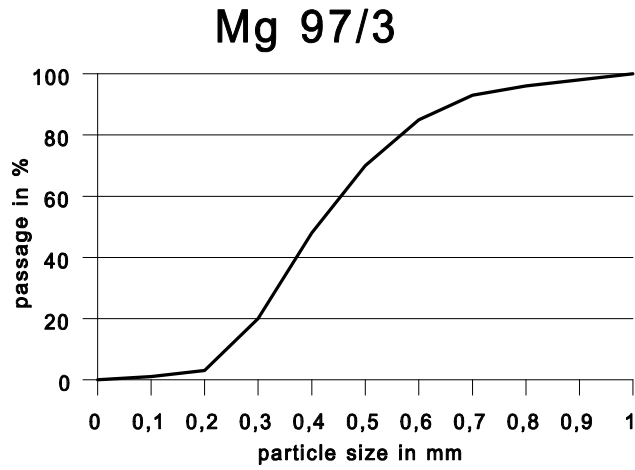


— particle-size distribution

Apparent Density: approx.800 kg*m⁻³

Special Properties: Very good flowability enabling exact dosage into the ladle. The special coating prevents oxydation, decreases the hazard of dust explosions and substantially increases the storage life.

Packing: container, big bag, silo- truck

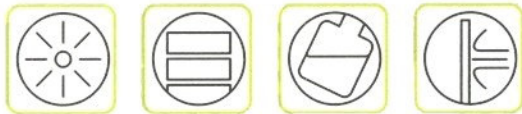

Organize San. Bölğ. 9. Sok. No. 7 | P. K. 29 Çerkezköy / Tekirdağ
Tel: +90-282-758 18 34 (Pbx) | Fax: +90-282-758 18 40
Çerkezköy V. D. No. 6100023355 | Tic. Sicil No. 1049
E-mail: info@magnezyummetal.com | www.magnezyummetal.com